

Bathroom

SOMBRERO


Single lever bidet mixer with pop up waste

Codice: 15120

FUNCTIONAL DATA

SCOPE OF APPLICATION: bidet TYPE OF PROJECT: residential FURNISHING STYLE: urban industrial FLOW REGULATION: suitable

TYPE OF DISPENSING: adjustable WASTE: automatic cap 1" 1/4

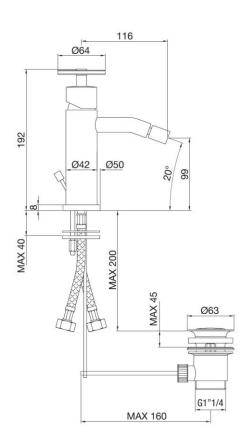

WARRANTY

See current price list

MAINTENANCE

DO NOT use scouring pads or cleaning agents containing alcohol, chlorine, acids, abrasives or similar. Use of any of the prohibited cleaning or maintenance products could damage the faucet surface. Use ONLY soap and water to clean the surface, then dry with a cloth or towel. Do not use abrasive or rough sponges.

Porta & Bini reserves the right to make any changes to its products without prior notice. The dimensions depicted within the graphic representations are to be considered indicative and subject to possible variation. If you have any questions, please contact your authorised Porta & Bini supplier.



CONSTRUCTION DATA

TYPE OF MATERIAL: brass
TYPE OF FIXING: deck-mounted

TYPE OF VALVE: ceramic disc cartdridge

ANGLE OF ROTATION: 90°

SUPPLY CONNECTION: 3/8" stainless steel hose

SPOUT SPACING: 116 mm

NUMBER OF INSTALLATION HOLES: 1
DIAMETER OF INSTALLATION HOLE: 35 mm

OPTIONAL: limited flow aerator 5 litres/min - 1,5 GPM

AVAILABLE COLOURS

Chrome
Natural brass
Chrome red handle
Chrome blue handle
Chrome turquoise handle
Black matt
Satin bronze
Dark copper
Satin nichel

Graphite
PVD Ultrasatin copper
PVD Ultrasatin brass

HYDRAULIC PERFORMANCES

OPTIMAL SUPPLY PRESSURE: 3 bar MAXIMUM HOT WATER TEMPERATURE: 80° RECOMMENDED MAX. HOT WATER TEMPERATURE: 60°

Porta & Bini Srl Faucet Company

Via per Alzo 60, 28017 San Maurizio d'Opaglio NO www.portaebini.it