


**FUNCTIONAL DATA**

SCOPE OF APPLICATION: bathtub  
 TYPE OF PROJECT: residential, tourist-receptive  
 FURNISHING STYLE: modern  
 TYPE OF DISPENSING: single

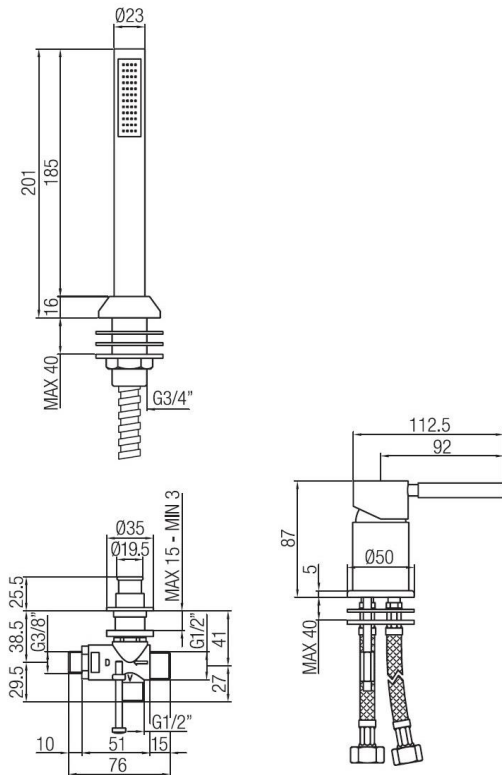

**CONSTRUCTION DATA**

TYPE OF MATERIAL: brass  
 TYPE OF FIXING: deck-mounted  
 TYPE OF VALVE: ceramic disc cartridge  
 ANGLE OF ROTATION: 90°  
 SUPPLY CONNECTION: 3/8" stainless steel hose  
 NUMBER OF INSTALLATION HOLES: 3  
 DIAMETER OF INSTALLATION HOLES: mixer 35 mm,  
 hand shower 28 mm, diverter 26 mm  
 SPACING OF INSTALLATION HOLES: 130 mm  
 (recommended)

**AVAILABLE COLOURS**

- Chrome
- Natural brass
- Black matt
- Satin bronze
- Dark copper
- Satin nichel
- Graphite
- Gold
- PVD Ultrasatin copper
- PVD Ultrasatin brass

**HYDRAULIC PERFORMANCES**

OPTIMAL SUPPLY PRESSURE: 3 bar  
 MAXIMUM HOT WATER TEMPERATURE: 80°  
 RECOMMENDED MAX. HOT WATER TEMPERATURE:  
 60°

**WARRANTY**

See current price list

**MAINTENANCE**

DO NOT use scouring pads or cleaning agents containing alcohol, chlorine, acids, abrasives or similar. Use of any of the prohibited cleaning or maintenance products could damage the faucet surface. Use ONLY soap and water to clean the surface, then dry with a cloth or towel. Do not use abrasive or rough sponges.