Single lever basin mixer with click-clack outlet

Codice: 29111

FUNCTIONAL DATA

SCOPE OF APPLICATION: basin

TYPE OF PROJECT: residential, transport FURNISHING STYLE: contemporary

TYPE OF DISPENSING: single (fixed aerator)

WASTE: click-clack quick cap 1"1/4



CONSTRUCTION DATA

TYPE OF MATERIAL: brass
TYPE OF FIXING: deck-mounted

TYPE OF VALVE: ceramic disc cartdridge

ANGLE OF ROTATION: 90°

SUPPLY CONNECTION: 3/8" stainless steel hose

SPOUT SPACING: 115 mm


NUMBER OF INSTALLATION HOLES: 1
DIAMETER OF INSTALLATION HOLE: 35 mm

AVAILABLE COLOURS

Chrome

HYDRAULIC PERFORMANCES

OPTIMAL SUPPLY PRESSURE: 3 bar MAXIMUM HOT WATER TEMPERATURE: 80° RECOMMENDED MAX. HOT WATER TEMPERATURE: 60°

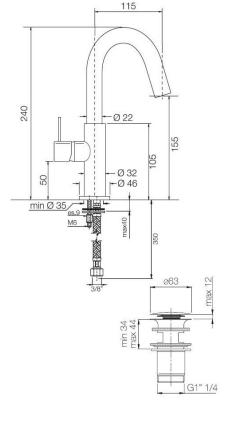

WARRANTY

See current price list

MAINTENANCE

DO NOT use scouring pads or cleaning agents containing alcohol, chlorine, acids, abrasives or similar. Use of any of the prohibited cleaning or maintenance products could damage the faucet surface. Use ONLY soap and water to clean the surface, then dry with a cloth or towel. Do not use abrasive or rough sponges.

Porta & Bini reserves the right to make any changes to its products without prior notice. The dimensions depicted within the graphic representations are to be considered indicative and subject to possible variation. If you have any questions, please contact your authorised Porta & Bini supplier.

Porta & Bini Srl Faucet Company Via per Alzo 60, 28017 San Maurizio d'Opaglio NO www.portaebini.it